

2,0 kW


2,5 kW

3,5 kW

4,2 kW

5,0 kW

7,1 kW

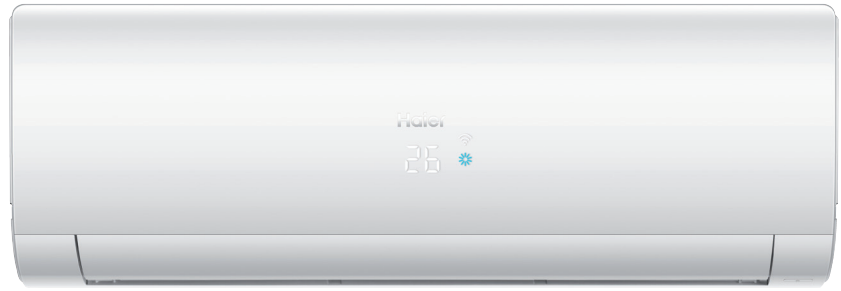

NEW
IES PLUS



Nano-Acqua



Self-Clean



Steri-Clean 56°C



Self-Higiene



NEW Wi-Fi



Silenziosità



Flusso 3D




Facile installazione


YR-HE di serie

UNITÀ INTERNA IES PLUS	Modello	AS20S2SF2FA-3	AS25S2SF2FA-3	AS35S2SF2FA-3	AS42S2SF2FA-3	AS50S2SF2FA-3	AS71S2SF2FA-3	
	Codice commerciale	2501300A2	2501301A2	2501302A2	2501304A2	2501305A2	2501306A2	
Dati prestazionali								
Potenza resa RAFF.	nom (min-max)	kW	2,0	2,6 (0,8-3,2)	3,5 (1,0-4,0)	4,2 (1,2-4,8)	5,2 (1,4-6,0)	7,0 (2,2-7,5)
Potenza resa RISC.	nom (min-max)	kW	2,5	3,2 (0,8-4,2)	4,2 (1,0-5,2)	4,4 (1,3-5,8)	6,0 (1,4-6,9)	8,0 (2,4-8,5)
Alimentazione		Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Volume aria trattato	H	m³/h	600	600	650	750	900	1100
Unità interna								
Potenza sonora RAFF.		dB(A)	53	53	55	58	57	60
Pressione sonora RAFF.		dB(A)	38/32/25/19	38/32/25/19	39/33/26/20	42/36/30/23	45/41/37/28	47/43/37/33
Dimensioni	L x P x H	mm	870x196x301	870x196x301	870x196x301	870x196x301	1009x223x327	1126x230x337
Peso netto		kg	9,5	9,5	9,5	9,5	12,0	15,2
Dati idraulici								
Tubazione liquido Ø		mm	6,35	6,35	6,35	6,35	6,35	9,52
Tubazione gas Ø		mm	9,52	9,52	9,52	9,52	12,7	15,88
Comando								
Di serie	Telecomando		YR-HE	YR-HE	YR-HE	YR-HE	YR-HE	YR-HE


AS20 - AS25 - AS35 - AS42

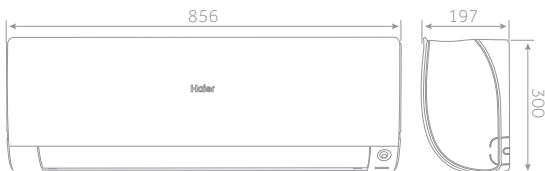

AS50

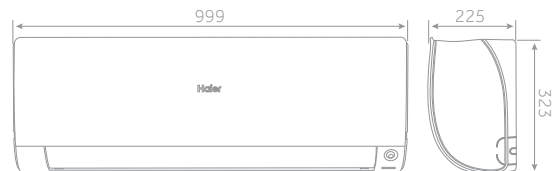


AS71

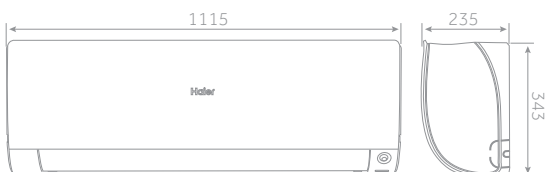

DIMA DI MONTAGGIO

AS20-AS25-AS35-AS42-AS50



AS71

